

UHD 3X1 HDMI 1.4 Switch

USER MANUAL

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 Product Description

This is a high performance 3 HDMI input and 1 HDMI output switch. It supports HDCP repeater functions and fast switching between any of the HDMI input ports. The system supports all 3D TV formats in addition to all HDTV formats up to 4Kx2K. Furthermore, the remote control gives uses complete control over the selection of sources and makes the device incredibly user friendly.

2.0 Features

Compliant with HDMI 1.4a, CTS 1.4a, DVI 1.0 standards.

HDMI 1.4 support: 3D TV support.

Support 3D Video & 4Kx2K, 8, 10, 12 & 16 bits per color depth.

Audio support:

Dolby TrueHD

DTS-HD Master Audio 7.1CH

Low power consumption, does not require an external power supply


3.0 Package Contents

- HDMI 1.4 3 by1 Switcher
- 5V DC Power Supply cable
- Remote control
- Operation Manual


4.0 Specifications

Frequency Bandwidth	2.97Gbps
Input Ports	3 HDMI Female ports
Output port	1 HDMI Female port
HDMI Audio Output	PCM2, 5.1, 7.1CH, Dolby 5.1, DTS5.1, D-TrueHD, DTS-HD
ESD ProtectionHuman Body Model	± 8kV (air-gap discharge) ± 4kV (contact discharge)
Dimensions (mm)	65(W)x118(D)x25(H)
Weight (g)	120
Power Consumption	0.2W
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F

5.0 Operation controls and Functions

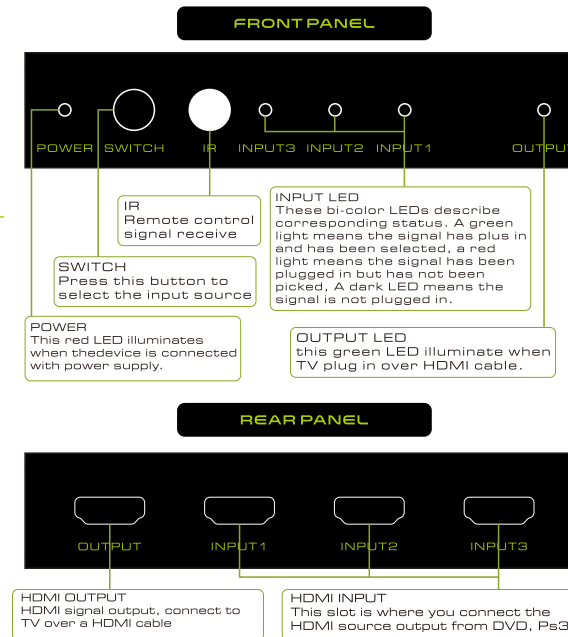


LEFT PANEL



DC 5V
Plug the 5V DC power supply into the unit and connect the adaptor to AC wall outlet

REMOTE CONTROL

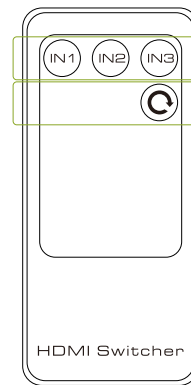

Press this button will force switch the input port and the LED will indicate the corresponding input source.

Press this button will cycle switch the input source and the LED will indicate the corresponding input source.

6.0 Connection diagram

